

JNMM120-355~375

High efficiency mono solar module

Adopting PERC technology

JNMM120

All cell production line equipped with SE laser instrument.

Advanced process to reduce extra degradation of PERC cell.

MBB and half-cut design to improve module reliability and reduces loss.

Higher power output effectively reduces BOS and LCOE.


Compatible with 1000V and 1500V system voltage.

CERTIFICATION



TUV: IEC/EN 61215, IEC/EN 61730
 BIS: IS 14286/IEC 61215, IS/IEC 61730
 GB/T 19001-2016/ISO 9001:2015
 GB/T 24001-2016/ISO 14001:2015
 OHSAS 18001:2007
 CNAS-CL01: ISO/IEC 17025:2017

QUALITY ASSURANCE

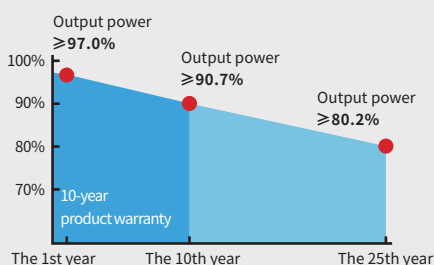

Advanced production process

Optimized MBB design
 Cell efficiency >22.5%



Superior quality control

Full automatic production line
 MES and ERP digitizing logistics management
 100% three times EL and appearance inspection



Excellent power generation performance

0~+5W positive power tolerance
 Improved low light irradiance performance and low degradation



Stable mechanical performance

Passed rigorous hail test
 Withstands 5400Pa snow and 2400Pa wind loads




Long weather resistance

Excellent anti-PID performance
 Certified in fireproofing for safety




JINNENG CLEAN ENERGY TECHNOLOGY LTD
JINNENG PHOTOVOLTAIC TECHNOLOGY LTD

No.1 Wenshui Economic Development Zone, Lvliang, Shanxi 032100, China
 No. 533, East Guang'an Street, Yuci District, Jinzhong, Shanxi 030600, China
 Tel: +86(354)2037999 E-mail: sales@jinery.com

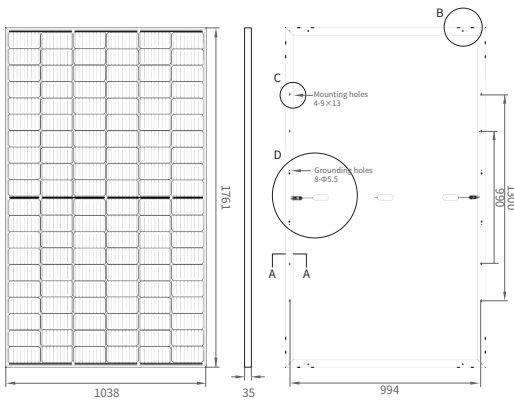

MECHANICAL PARAMETERS

Cell (mm)	166*83 Mono
Dimensions (L*W*H) (mm)	1761*1038*35
Weight (kg)	19.2
Cable Cross Section Size (mm ²)	4
Cable Length (mm)	Positive 295 / Negative 145
No. of Cells & Connections	120(6*20)
No. of Diodes	3

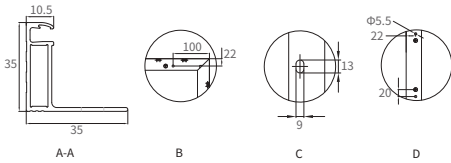

TEMPERATURE COEFFICIENTS

Nominal Module Operating Temperature (NMOT)	45±2°C
Temperature Coefficient Voltage (Voc)	-0.29 %/°C
Temperature Coefficient Current (Isc)	0.04 %/°C
Temperature Coefficient Power (Pm)	-0.38%/°C

QUALIFICATION


Max. System Voltage (V DC)	1000 /1500
Temperature Cycling Range (°C)	-40~+85
Max. Series Fuse Rating (A)	20
Max. Wind Load / Max. Snow Load (Pa)	2400 / 5400
Hot Spot Rate	100% Free
Connector Type	MC4 Compatible
Fire Rating	Class C
Junction Box & Connector Protection Grade	IP68

ELECTRICAL PARAMETERS

JNMM120-355 JNMM120-360 **JNMM120-365** JNMM120-370 JNMM120-375

	JNMM120-355	JNMM120-360	JNMM120-365	JNMM120-370	JNMM120-375	
STC AM1.5 1000W/m ² Cell Temperature 25°C	Max. Power at STC (Pmpp/W)	355	360	365	370	375
	Output Tolerance (W)	0~+5	0~+5	0~+5	0~+5	0~+5
	Max. Power Voltage (Vmp/V)	33.50	33.68	33.89	34.08	34.28
	Max. Power Current (Imp/A)	10.60	10.69	10.77	10.86	10.95
	Open Circuit Voltage (Voc/V)	40.70	40.90	41.10	41.30	41.50
	Short Circuit Current (Isc/A)	11.10	11.20	11.28	11.37	11.46
	Module Efficiency (%)	19.4	19.7	20.0	20.2	20.5
NMOT AM1.5 800W/m ² Ambient Temperature 20°C Wind Speed 1m/s	Max. Power at NMOT (Pmpp/W)	264.2	267.9	271.6	275.4	279.1
	Max. Power Voltage (Vmp/V)	31.16	31.33	31.53	31.70	31.86
	Max. Power Current (Imp/A)	8.48	8.55	8.62	8.69	8.76
	Open Circuit Voltage (Voc/V)	38.17	38.36	38.54	38.73	38.92
	Short Circuit Current (Isc/A)	8.96	9.04	9.10	9.17	9.25

I-V CURVE(365W)

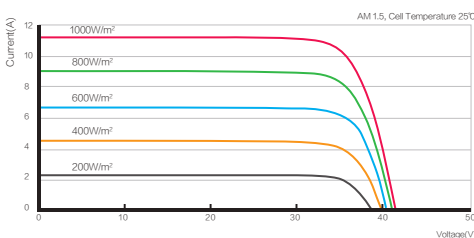

PACKING CONFIGURATION

Container (High cube)

Pieces Per Pallet	31
Pallets Per Stack	2
Stacks Per Container	13
Pieces Per Container	806

CAUTION: The contents of this specification are measured under standard test conditions and are for reference only and are subject to change without notice. Read safety and installation instructions before using the product.
 © 2020 (1) JINNENG CLEAN ENERGY TECHNOLOGY LTD. ALL RIGHTS RESERVED.